


16	EQUALIZING VALVE	1		
15	LIMIT SWITCH	1	PROXIMITY,DC24V, APL341	HIGH TEMP.
14	ACTUATOR	1	DOUBLE ACTING	HIGH TEMP.
13	DECLUTCH HAND WHEEL	1		
12	BRACKET	1	SS400	Painted
11	GLAND	1	PTFE	
10	GLAND PACKING	1 SET	GRAPHITE	
9	COVER	1	SUS304	
8	STEM RETAINER	1 SET	BRASS	
7	STEM BUSH	1 SET	SS	
6	TAPPER PIN	1 SET	SUS630	
5	STEM	1	SUS630	
4	CAP	1	SUS304	
3	SEAT	1	INCONEL 625	
2	DISC	1	CF8 or SC513	
1	BODY	1	CF8 or SC513	
NO	PART NAME	QTY	MATERIAL	REMARK

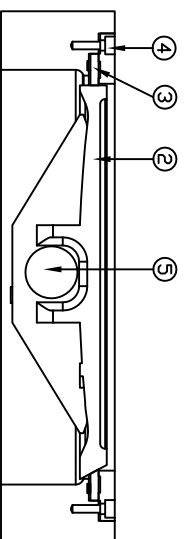

PNEUMATIC TRIPLE OFF-SET CONTROL VALVE			
TEST PRESSURE	SHELL(Kg/cm <sup>2</sup> )	SEAT(Kg/cm <sup>2</sup> )	
HYDROSTATIC	15	11	

\* CONN. : JIS 10K WAFER, MAX. 400 C DEG., LEAKAGE : ANSI CLASS IV

D I M E N S I O N S

UNIT : MM

SIZE	D I M E N S I O N S										
	L	PCD F	n(N)-øh	HI	H2	H3	H4	H5	H6	MODEL	
10"	250A	70	355	4(16)-ø25	235	255	300	420	390	200	SSI25D-TB250A-MHF-PHG
14"	350A	81	445	4(16)-ø25	275	300	300	500	506	310	SSI60D-TB350A-MHF-PHG
16"	400A	102	500	4(16)-ø27	355	375	300	500	506	310	SSI60D-TB400A-MHF-PHG
18"	450A	115	565	4(20)-ø27	380	408	300	530	578	310	SSI85D-TB450A-MHF-PHG

REV	DATE	FOR APPROVAL	Y.J.LEE		
0	2017.04.24				
DRAWING NO		TRI-315-10K-2017-K			
DESCRIPTION		PREP.	CHECK	APP.	
<b>KOVATEC CO.,</b>					

