

PNEUMATIC CYLINDER VALVE

(HKT-2020)



★ SMALL & COMPACT, BEST PRICE & QUALITY

★ APPLICABLE FOR COMPLICATE PLACE AND NARROW SPACE

SPECIFICATIONS



- **Mat'l** : Body - Bronze, Seat - Glass 15% Teflon, Packing - Viton
- **End conn.** : PT screwed
- **Size** : 15A, 20A, 25A, 32A, 40A, 50A
- **Applicable Fluid** : Water, Air, Gas, Oil, Steam, Etc
- **Applicable Field** : Food, Cloth & Dyeing, Environment, Mechanics, Air-dryer, etc.
- **Temp.** : under 180℃
- **Shell test pressure** : 20kg/cm²
- **Max working pressure** : 16kgf/cm²
- **Air to Open(Fail to close)**
- **Operating air pressure** : 4-7kg/cm²

PNEUMATIC CYLINDER VALVE(HKT-2020)

★ SMALL & COMPACT, BEST PRICE & QUALITY

★ APPLICABLE FOR COMPLICATE PLACE AND NARROW SPACE

DIMENSIONS

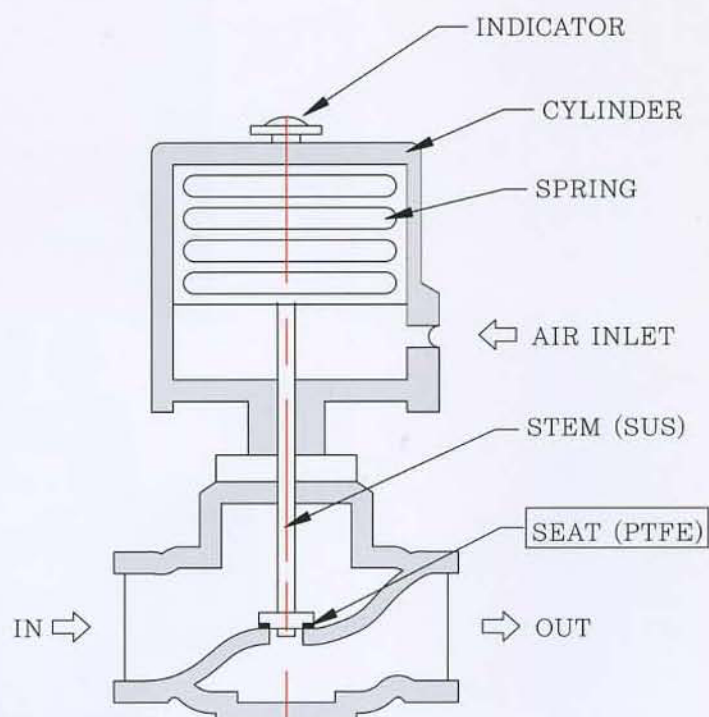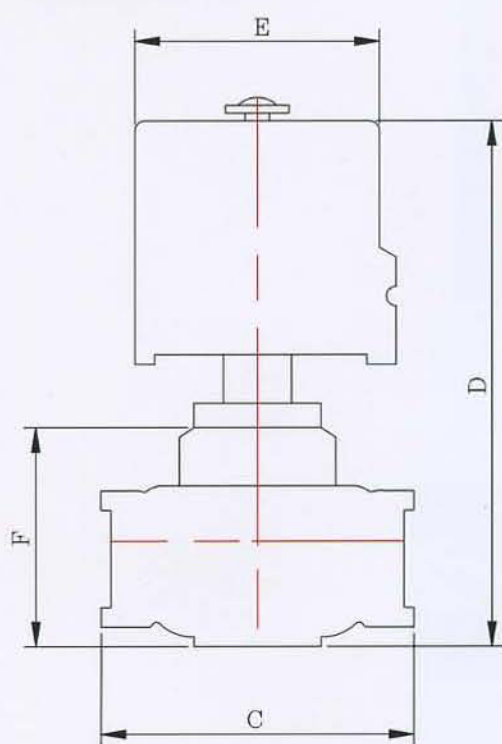

SIZE(A)	C	D	E	F
15A	100	165	80	53
20A	100	170	80	58
25A	105	182	80	70
32A	105	190	80	78
40A	130	220	96	92
50A	150	225	96	105

주요 취급품목

- 전동 액츄에이터
- 공압액츄에이터
- 약세서리 : 리미트 스위치, 포지셔너
- 콘트롤 버터플라이 / 볼 밸브
- 콘트롤 글로브 밸브(전동)
- 기타 액츄에이터 / 밸브류

KOVATEC

TEL : (02)2671-4676~7

FAX : (02)2671-4710