


PNEUMATIC CYLINDER VALVE

MODEL : KVP - 2000

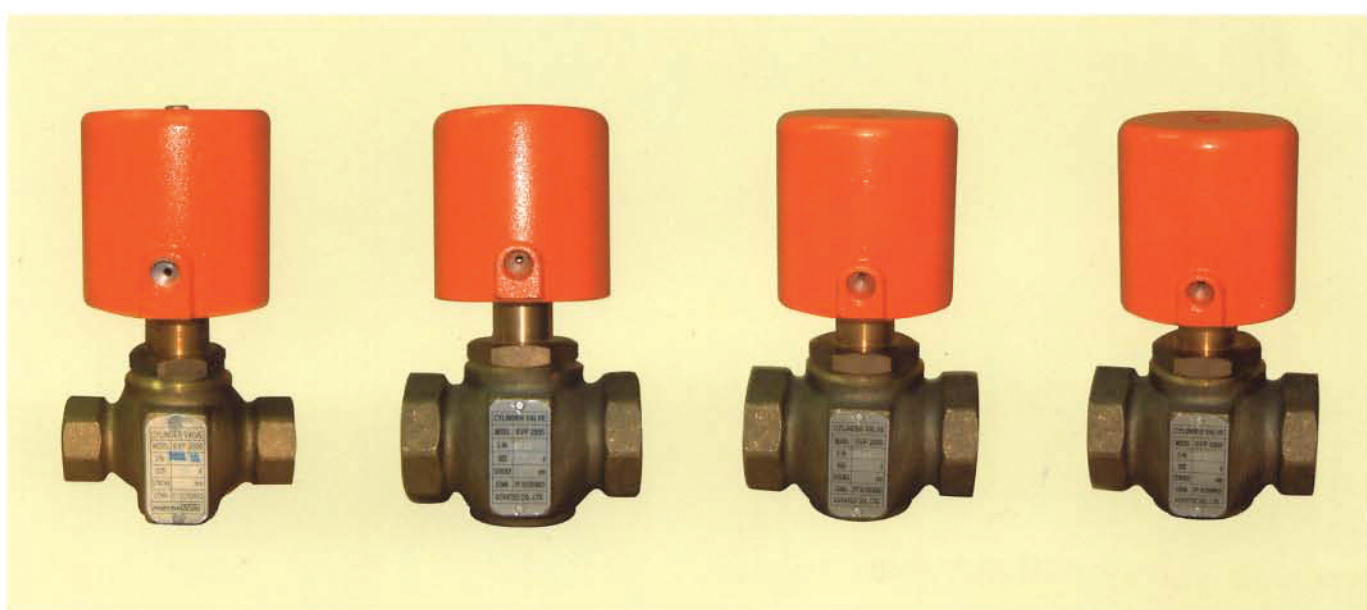


특징(Features)

- 소형, 경량, 가격저렴, 최고품질(Small, Compact, Low Price & Good Quality)
- 복잡하고 좁은 공간에 쉽게 적용(Application for Complicate place, Narrow space)

SPECIFICATIONS


- 적용(Application) : Food, Cloth & Dyeing, Environment, Mechanics, Air dryer system, etc.
- 적용유체(Application Fluid) : Water, Air, Steam, Oil, etc.
- 재질(Materials) : Body & Trim - Bronze
Seat - Glass 15% Teflon
(User가 요구시에는 Body 재질 - SUS304 or SUS316 제작공급 가능)
- 사용유체온도(Temperature) : Max. 180°C
- 주위온도(Ambient Temperature) : -20 ~ 80°C
- 사용압력(Operating Pressure) : 16kg/cm²
- 테스트 압력(Test Pressure) : 20kg/cm²
- 연결(End connection) : PT screwed
- Air 투입시 Open(Fail to Close Type)
- 밸브구경 : 15A, 20A, 25A, 32A, 40A, 50A

DIMENSIONS

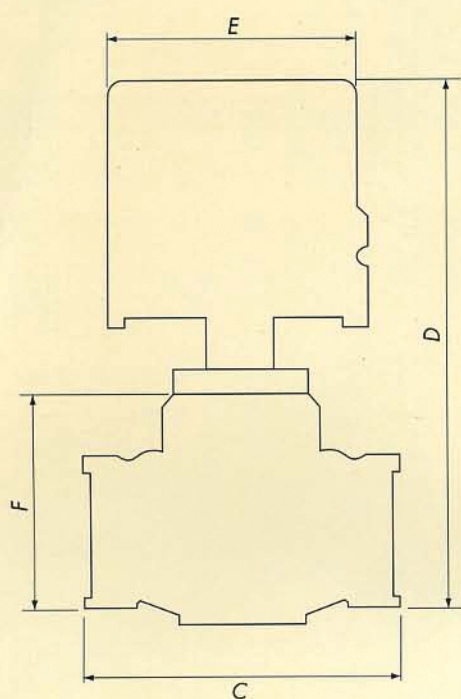

SIZE(A)	C	D	E	F
15A	100	160	55	67
20A	100	160	55	68
25A	105	186	85	70
32A	105	190	85	74
40A	130	220	96	92
50A	150	225	96	105

MECHANICAL DATA

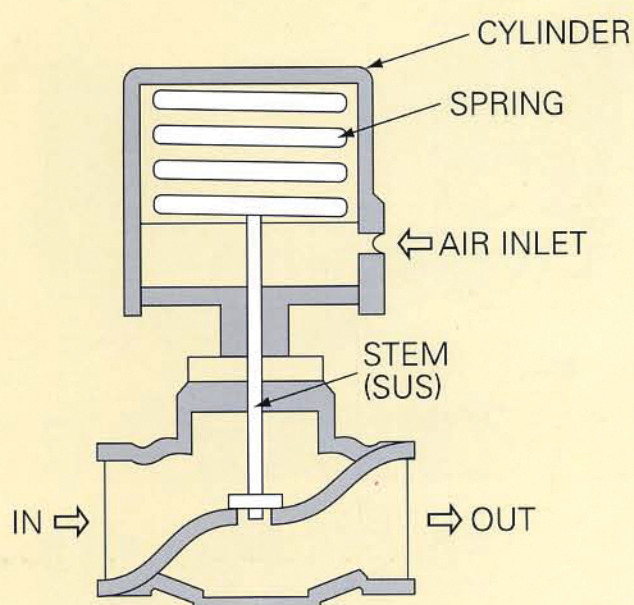

- 실린더 내부에 스프링 내장 (Fail to Close)
- 재질(STEM) : SUS 304